


Single Full Frame and Convertible Rollers

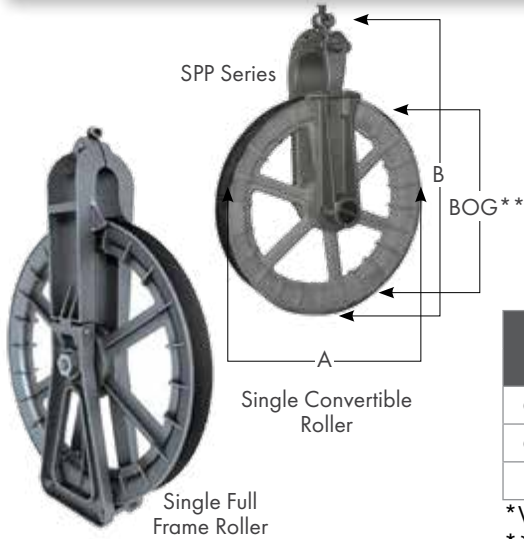

- ✓ Suitable for Distribution & Transmission
- ✓ Extra large contoured throat for swivels, grips and splices
- ✓ Precision ground bearings reduce pulling loads for accurate sagging
- ✓ Secured pins
- ✓ Durable and fully corrosion protected
- ✓ Urethane lined
- ✓ Socket fitting standard

Style	Part No. Urethane lined	Dimensions (mm)			Wt (kg)	WLL* (kg)
		A	B	BOG**		
Convertible	SPP-1B-460-UL	560	750	460	26	3636
Convertible	SPP-1B-610-UL	710	900	610	32	3636
Full Frame	78S-42-UL	1067	1473	914	70.5	2570


*Working Load Limit (WLL) based on a safety factor of the 3:1 Ultimate Tensile Strength

** BOG = Bottom of groove dimension

Triple Bundle Stringing Rollers



- ✓ Moulded aluminium sheaves mounted on ball bearings
- ✓ Interchangeable nylon sectors
- ✓ Galvanised steel frame
- ✓ Comes with heli-horn for Helicopter operations
- ✓ Weight 250kg
- ✓ 180kN Working Load Limit

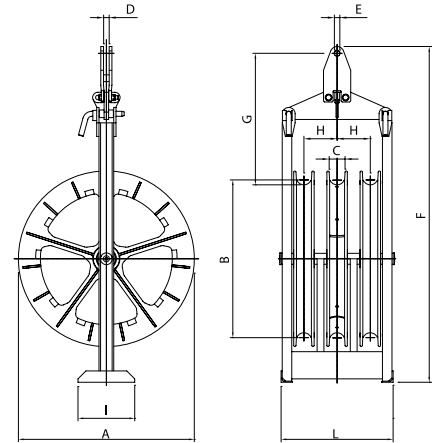

**BOG =
Bottom of Groove dimension

Dimensions (mm)									
A	B**	C	D	E	F	G	H	I	L
893	800	95	25	26	1775	765	175	300	805

Universal Stringing Roller

Part No. SPP-1A



- ✓ Suitable for distribution and ABC
- ✓ Lightweight high strength heat treated aluminium sheave
- ✓ Also available neoprene and urethane lined
- ✓ Versatile attachment fittings include side and bottom tags and top ball socket fitting
- ✓ Side gate latch can be locked open
- ✓ Sheave is profile machined permitting precise sagging of conductor

Max. OD conductor (mm)	50
WLL (kg)	1130
Weight (kg)	4.3
BOG Dia. (mm)	110
W x H (mm)	206 x 406

Universal Roller Bracket

Part No. SPP-1A-BKT



- ✓ Versatile mounting bracket for cross arms and poles
- ✓ Frame made from Cast Aluminium
- ✓ Lightweight, easy to install
- ✓ Heavy Duty Strap and Zinc plated Ratchet Assembly
- ✓ 3 Mounting holes for various configurations
- ✓ Ball pin to secure roller

Min. cross arm size (mm)	100 x 100
Suits poles OD (mm)	200 - 470
WLL (kg)	500
Weight (kg)	2

**Roller & bracket
hired
separately**